



SUMMARY • FACTORY RESET

SOMFY SONESSE 30 RTS

HOLD PROGRAM 12 s

JOGS AT 2 • 7 • 12 s

RELEASE AFTER THE 3rd JOG



2 jogs (7 s) = erase remotes only

1 jog + quick press = sleep mode,
not a reset

Sonesse 40 / 50 RTS 120 V:
dual power cut instead

R28 WireFree: same 3 jogs,
button by the power lead

integratornotes.com/cards/010

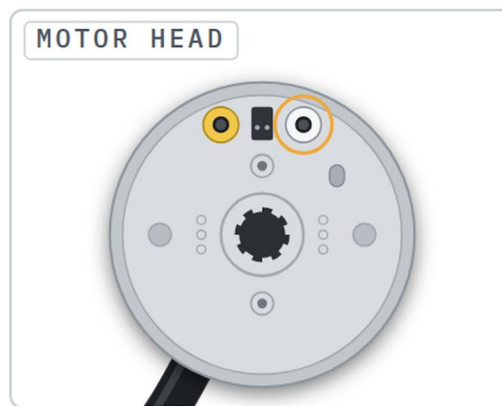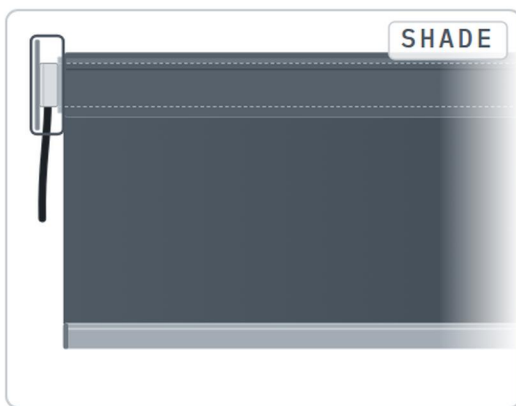

INTEGRATOR NOTES

@integratornotes